



Comparative study on seismic behaviour of high rise building using shear wall and bracing as lateral load resisting method

Divya M^{1*}, Aravindhan M², Sathish kumar S², Suhail Sainudheen K², Manikandan S³

¹ Assistant Professor, Civil Engineering, Salem College of Engineering and Technology, Salem, Tamil Nadu, India

² Student, Civil Engineering, Salem College of Engineering and Technology, Salem, Tamil Nadu, India

³ Student, Civil Engineering, Mahendra College of Engineering, Salem, Tamil Nadu, India

Abstract

Earthquake is the natural catastrophe it produces strong ground motions to affect the building structure. Weak motions that cannot be discern by the humans. The shear walls and bracings are institute to magnify the lateral stiffness, ductility, minimum lateral displacements and safety of the building structure. Storey drift and lateral displacements are the critical issues in the seismic design of buildings structure. In this project a, G+16 storey building, along with shear wall and two different types of bracing is considered for analysis. The performance of building will be valued on the basis of following specification – Storey displacement, Storey drift, Base shear. This work, shear walls and bracings are provided at edges with the overall analysis to be done by using ETABS software.

Keywords: ETABS, seismic analysis, bracing, shear wall

Introduction

In addition to the gravity loads, the structure should withstand lateral forces caused by earthquake or wind depending upon the terrain category. The lateral loads produce sway moments and induce high stresses, thus reduces the stability of the structure. In order to resist lateral forces stiffness of structure is more important parameter than strength. The lateral load resisting systems that are widely used are rigid frame, shear wall, diagrid structural system, wall frame, braced tube system, outrigger system and tubular system. The RCC bracing results in higher stiffness and stability as a potential advantage over other bracing systems, whereas Steel bracing results in increase in stiffness without much increase in seismic weight. In conclusion, lateral bracing system provides stiffness and stability to the structure, and is economical. The BIS code IS 1893:2002 is taken as criteria for earthquake resistant design of structures. This standard provides basis for calculation of base shear, torsion, storey drift, and design lateral force in structure due to lateral seismic action. These parameters are affected by nature of foundation soil, material, size, shape, type of structure, duration of seismic activity and ground motion characteristics. It also provides the limitations of storey drift In addition to the gravity loads, the structure should withstand lateral forces caused by earthquake or wind depending upon the terrain category. The lateral loads produce sway moments and induce high stresses, thus reduces the stability of the structure. In order to resist lateral forces stiffness of structure is more important parameter than strength. The lateral load resisting systems that are widely used are rigid frame, shear wall, diagrid structural system, wall frame, braced tube system, outrigger system and tubular system. The RCC bracing results in higher stiffness and stability as a potential advantage over other bracing systems, whereas Steel bracing results in increase in stiffness without much increase in seismic weight. In conclusion, lateral bracing system

provides stiffness and stability to the structure, and is economical. The BIS code IS 1893:2002 is taken as criteria for earthquake resistant design of structures. This standard provides basis for calculation of base shear, torsion, storey drift, and design lateral force in structure due to lateral seismic action. These parameters are affected by nature of foundation soil, material, size, shape, type of structure, duration of seismic activity and ground motion characteristics. It also provides the limitations of storey drift Few of the lateral load resisting system

- Frame Action of Column and Slab Systems
- Braced Frame
- Shear Wall
- Framed shear Wall
- Framed Tube System
- Tube in Tube System

Objectives

The main objective of this project is to check and compare the seismic response of multi- storied building by using shear wall, X bracing and inverted V bracing.

- a. Behaviour study of G+16 storey tall building with four different models one is bare frame, one with shear wall and other with X and inverted V bracing at corner of building for seismic loads.
- b. The variation of displacement, storey drift, storey shear of the models to be studied.
- c. The model is analysed in zone V.
- d. Response spectrum analysis is to be carried out.

Design model

- a. Modelling of G+16 storey building using ETABS software
- b. Shear wall and Bracing system (X bracing and inverted V bracing) are applied at corner periphery of the building.

- c. Parameters considered in this project are storey displacement, storey shear and storey drift.
- d. Seismic zone considered in this project is zone V
- e. Evaluate the analysis result and verify the requirement of geometrical limitations

Problem statement

The study is focused on seismic behaviour of Regular Multi-Storey RCC (G+16) building located in Zone V with using ETABS-2018 Software. The Lateral load resisting system used in the building are Bracings and Shear wall.

- a. Model-1 Bare frame building.
- b. Model-2 Frame with Shear wall at the corner of building.
- c. Model-3 Frame with X Bracing at the corner of building.
- d. Model-4 Frame with inverted V bracing at the corner of building.

Geometrical properties

Description of building

The size of the building in plan-(35 m x 35 m) (COMMERCIAL)

Bay width of plane frame (In both X and Z): 3.5 m

Number of stories: 17 (G+16) Ground storey height: 3.5 m

Intermediate floor height: 3 m Type of soil: medium soil

Zones: V

Materials

Grade of concrete: M25

Grade of steel: Fe-550

Density of concrete: 25 KN/m³

Density of masonry infill: 20 KN/m³

Member dimensions

Column size: (900 mm* 600 mm)

Beam size: (500mm* 300mm) Slab thickness: 125 mm

Thickness of external Wall: 230 mm Thickness of internal

Wall: 115 mm Thickness of Shear Wall: 200mm Clear

cover of Column: 40 mm

Clear cover of beam: 25 mm

Clear cover of slab: 20 mm

Clear cover of shear wall: 25

Loads considered

Dead Load: Self weight Floor Live Load: 4KN/m²

Roof live load: 1.5KN/m²

Wall Load: 13 KN/m² (9" Thick) Other Loads: Seismic Load

Seismic load

Seismic design shall be done in accordance with IS: 1893:2016. The parameters to be used for analysis and design are given below (As per IS: 1893:2016 (Part I)).

Zone: V Zone factor: 0.36 (IS 1893 (Part 1) Importance factor: 1.2

Response reduction: 5.0

Soil type: Type 2

Modelling of structure

The modeling of the members like Beam, Column and Slab will be done as per the standard procedure by adopting following properties

- a. Beams, Column will be designed by M30 grade of concrete and Fe415 and Fe250 grade of steel.
- b. The slab will be defined as thin shell in ETABS.
- c. The building to be modeled is having G+16 storeys.

- d. Shear wall and Bracing system are applied in the building to resist Lateral Loads.

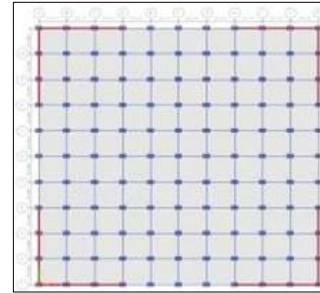


Fig 1: Plan view of building

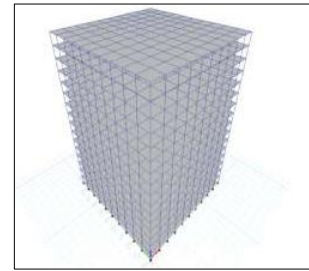


Fig 2: Bare Frame Building

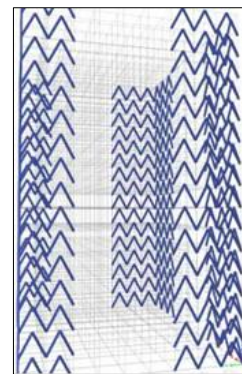


Fig 3: Building with X Bracing

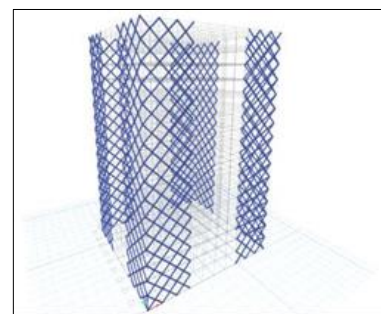


Fig 4: Building with Inverted V Bracing

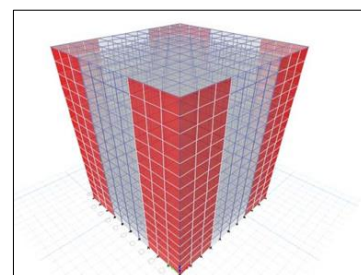


Fig 5: Building with Shear Wall

Results and Discussion

Total displacement of any story with respect to ground is defined as story displacement. Maximum permissible story displacement is limited to $H/500$, where H is the total height

of building. The maximum displacement in bare frame, shear wall, X bracing and inverted V bracing are 24.46mm, 15.45mm, 21.5mm, and 21.88 mm respectively.

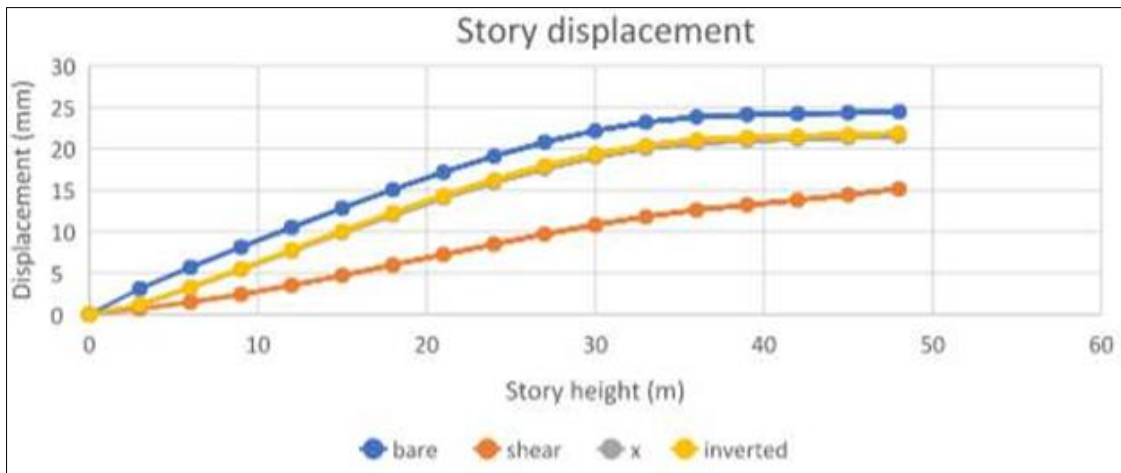


Fig 6: Comparative Graph Showing Displacement in Y Direction

Table 1: Story displacement

Elevation m	Bare frame	Shear wall	X bracing	Inverted v bracing
48	24.462	15.145	21.545	21.889
45	24.337	14.447	21.344	21.703
42	24.232	13.811	21.172	21.547
39	24.098	13.208	20.982	21.371
36	23.836	12.612	20.682	21.08
33	23.21	11.804	20.025	20.424
30	22.176	10.812	18.977	19.367
27	20.784	9.697	17.591	17.963
24	19.095	8.5	15.931	16.275
21	17.171	7.251	14.057	14.366
18	15.069	5.983	12.022	12.29
15	12.838	4.732	9.876	10.099
12	10.517	3.532	7.661	7.836
9	8.137	2.436	5.425	5.543
6	5.704	1.476	3.225	3.28
3	3.133	0.679	1.208	1.216
0	0	0	0	0

The word “Drift” can be defined as the lateral displacement of the structure, Storey drift is the slower and small movement of one level of a multilevel building relative to the level below. Inner storey drift is the difference between the floor and roof displacements of any given story as the building sways during the earthquake, marked by the story

height, more is the storey drift will cause more damages to the structures, its value should not be beyond the limit $0.004h$, where (h) is height of the building. The value of story drift increases up to the mid height of building and then decreases to the top of building.

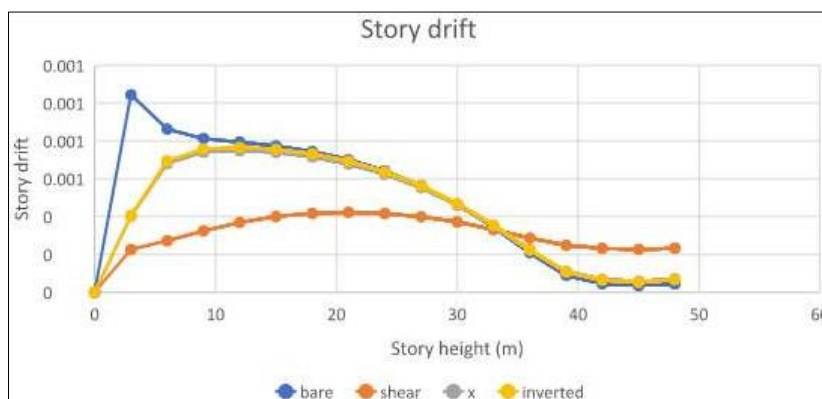


Fig 7: Comparative Graph Showing Displacement in Y Direction

Table 2: Story drift

Elevation m	Bare Frame	Shear Wall	X bracing	Inverted V bracing
48	4.5E-05	0.000233	0.00007	0.000066
45	3.5E-05	0.000227	0.000058	0.000053
42	4.5E-05	0.000232	0.000068	0.000064
39	8.9E-05	0.000248	0.000109	0.000107
36	0.00021	0.000286	0.000222	0.000225
33	0.00035	0.000331	0.000349	0.000355
30	0.00046	0.000372	0.000462	0.000469
27	0.00056	0.000399	0.000553	0.000563
24	0.00064	0.000416	0.000625	0.000637
21	0.0007	0.000423	0.000678	0.000693
18	0.00074	0.000417	0.000715	0.000732
15	0.00077	0.0004	0.000739	0.000756
12	0.00079	0.000369	0.000749	0.000766
9	0.00081	0.000324	0.000741	0.000758
6	0.00086	0.000272	0.000681	0.000695
3	0.00104	0.000226	0.000403	0.000405
0	0	0	0	0

The amount of maximum lateral force because of seismic ground motion at the soffit or base of the structure is base shear, its horizontal movement of base of the structures, it depends on following factors: Condition of soil on the site, Closeness to potential sources of seismic activity like

geological faults, Probability of significant seismic ground motion due to earthquakes, Total weight of Building, Period of the vibration. Base shear is inversely proportional to story displacement. Maximum shear occurs on bottom of the building.

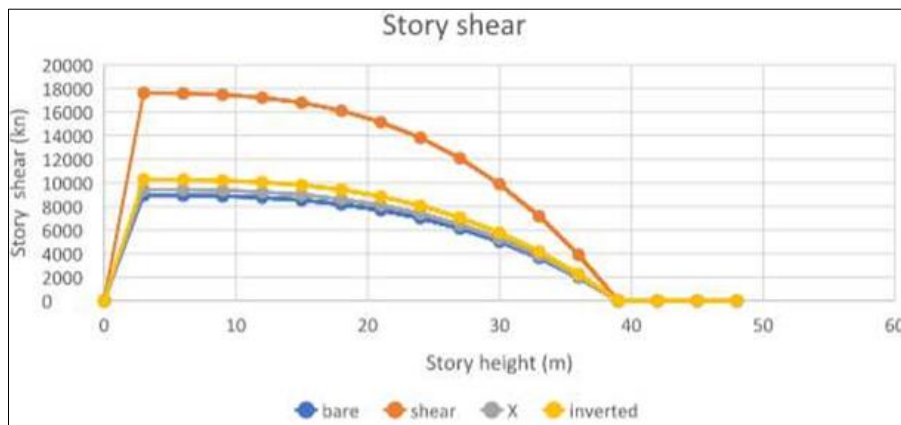


Fig 8: Comparative Graph Showing Displacement in Y Direction

Table 3: Story shear

Elevation m	Bare frame	Shear wall	X bracing	Inverted V bracing
48	0	0	0	0
45	0	0	0	0
42	0	0	0	0
39	0	0	0	0
36	1982	3900	2068.7	2278.2
33	3648	7178	3840.1	4192.5
30	5024	9886	5289.2	5774.6
27	6139	12080	6463	7056.1
24	7020	13814	7390.4	8068.6
21	7694	15141	8100.5	8843.8
18	8190	16116	8622.2	9413.4
15	8534	16793	8984.4	9809.9
12	8754	17226	9216.3	10062
9	8878	17470	9364.7	10204
6	8933	17579	9404.7	10268
3	8947	17606	9419.2	10284
0	0	0	0	0

Conclusions

a. From the above results introducing shear walls reduces the sway or displacement

b. Base Shear of the above-Mentioned Structures Heavily Increases And makes the Structure stable against seismic loading.

- c. The Natural Time period of the above designed Structures are highly reduced after placing of bracings and Shear walls with comparison to Normal structure.
- d. The lateral forces are resisting capacity is highly increased after the placement of Shear wall.
- e. When comparing the above Structures Lateral displacements are minimal when Shear wall are applied.
- f. From the above Comparison of structures and through discussion it is concluded that Shear wall could improve the lateral Stability of the structures.
- g. On comparison of various parameters like story drift, story displacement and story shear, building with shear wall has better performance than both bracing.
- h. Model with least story displacement and maximum base shear value resist maximum lateral force therefore building with shear wall resist maximum lateral loads

Acknowledgments

The authors are willingly thankful to all the professors and mentors who help for the preparation of this paper and would also like to thank all the reviewers, our main authors for their comments to improve the quality and presentation of paper.

References

1. Albert Philip, Dr. Elavenil S. Performed study on seismic analysis of high rise building with plan irregularity. The objective of the project is to carry out seismic analysis of regular and irregular reinforced concrete building, 2017.
2. Bhargava Laxmi Goli, Himath Kumar, Yerramasetty Lingeshwaran. Performed Analytical study on buckling restrained braced frame under lateral load using ETABS, 2017.
3. Johannes Schneider, Matthias Schweinsteiger. Carried out study on lateral load resistance of cross Laminated wood panels, 2010.
4. Kartik Prashar, Jagdeep Singh Gahir. Carried out study on Seismic Behavior of RC Frame Structure with Different Types of Bracing System, 2018.
5. Lin Hai Han, You Fu Yang. Seismic behavior of concrete-filled steel tubular frame to RC shear wall high-rise mixed structures, 2009.
6. Mohammadhosein, Ramin hajmoosa. Carried out study on Effect of viscous dampers on application on seismic response of high rise building, 2017.
7. Snehal S Mali, DM Joshi. Studied on Response of High-Rise Building with Different Diagrid Structural System, 2017.