



## Performance evaluation of nanoparticle-modified asphalt binders

Sahil Deswal<sup>1</sup>, Shivani<sup>2</sup>, Ravinder<sup>3</sup>

<sup>1</sup> Scholar, Department of Civil Engineering, Satpriya group of Institutions, Rohtak, Haryana, India

<sup>2</sup> Assistant Professor, Department of Civil Engineering, Satpriya group of Institutions, Rohtak, Haryana, India

<sup>3</sup> Scholar, Department of Civil Engineering, MMDU Mullana Ambala, Haryana, India

### Abstract

Customary tests (infiltration, malleability, and relaxing point) and a unique shear rheometer were utilized to describe the physical and rheological properties of black-top fastener (DSR). Calcium carbonate nanoparticles (CaCO<sub>3</sub>) and aluminum hydroxide (Al<sub>2</sub>O<sub>3</sub>) nanoparticles were acquainted with the fundamental black-top at groupings of 3, 5, and 7% by weight of black-top, separately, in this examination. The expansion of CaCO<sub>3</sub> and Al<sub>2</sub>O<sub>3</sub> content to the black-top significantly affects the actual properties of the black-top, with infiltration decreased by up to half for CaCO<sub>3</sub> changed black-top and 64% for Al<sub>2</sub>O<sub>3</sub> altered black-top. When contrasted with the base black-top folio, the conditioning point of altered black-top covers expanded by 11 and 12 percent for the two modifiers, separately. The outcomes likewise uncovered that the capacity soundness of changed black-top folios containing CaCO<sub>3</sub> and Al<sub>2</sub>O<sub>3</sub> nanoparticles was under 2.5 °C, showing that the black-top fastener and modifiers are exceptionally viable. The solidness (G\*) of changed black-top covers was improved with the expansion of the two modifiers, and the best presentation of black-top fastener was gotten with the expansion of 5% of both nanoparticles. Subsequently, the utilization of CaCO<sub>3</sub> and Al<sub>2</sub>O<sub>3</sub> nanoparticles as an elective added substance to change black-top folio can be thought of.

**Keywords:** calcium carbonate nanoparticles; dynamic shear rheometer; modified asphalt binder; storage stability

### Introduction

Black-top is a dim brown to dark cementation material made principally of bitumen, which can be found in nature or fabricated through oil handling. Pavements are gooey fluids or solids that are generally comprised of hydrocarbons and subordinants that are dissolvable in carbon disulfide [1, 2]. They are generally nonvolatile at room temperature and continuously mellow when warmed. Black-top has been used for millennia, and its importance as a significant designing material is developing. Since bitumen is regularly used in the development of motorways and street organizations, black-top ought to have the option to endure traffic loads and low temperatures [three]. Because of the restrictions of temperature defenselessness, the black-top's low, center, and high temperatures, as well as its temperature execution, should be moved along. Subsequently, changing the base black-top is expected to expand the material's exhibition.

### Literature Review

FA is an exceptionally dispersible powder. It contains predominantly alumino silicate and ferriferous shiny circular particles (around 60 - 80%) and unpredictably molded grains of undefined dirt, mullite quartz and unburned transformative fuel (Malhotra and Ramezaniarpour, 1994; Diamond, 1986). BA comprises of sporadic particles, which can depend on 10-15 mm in size. The compound arrangements of FA and BA remains from a similar power plant are comparative (Yun *et al.*, 2004). Contingent upon the cooling conditions, the polished or glasslike stage can be prevailing in BA (Nisnevich *et al.*, 2001).

Generally speaking, BA is dormant and can be utilized as total for delivering development materials like mortar and cement. Furthermore, BA can be utilized straightforwardly as total in street development (Bruder-Hubscher *et al.*, 2001).

Fly debris got from coal ignition is often utilized in concrete as a savvy substitute for portland concrete. The pozzolanic properties of fly debris work on the strength of cement, and its little circular particles make the substantial combination more serviceable (Pei-wei *et al.*, 2007).

Broad innovative work works have been finished on the utilization of fly debris as a part of cement (Aitcin and Laplante, 1992; Fernández-Jiménez *et al.*, 2006; Chindaprasirt *et al.*, 2007), and on the progressions that its fuse prompts in both mechanical (Topcu and Canbaz, 2007) and warm (Demirboga, 2007) properties. Besides, Lingling *et al.* (2005) found that fly debris works on the compressive strength of blocks and makes them more impervious to ice assault. Cicek and Tanriverdi (2007) likewise noticed the beneficial outcome of fly debris on the compressive strength of blocks.

A few examinations have been completed in Germany, England, and China to create blocks from fly debris (Guler *et al.*, 1995; Kalwa and Grylicki, 1983; Mukherji and Machhoya, 1993; Lingling *et al.*, 2005)

### Experimental Design

#### Materials

Materials were used to produce some laboratories mixed; Base bitumen binder used in this study was 60/70 penetration grade while the nonmaterial's were aluminum oxide nanoparticles (Al<sub>2</sub>O<sub>3</sub>) and Calcium Carbonate nanoparticles (CaCO<sub>3</sub>) white powder were supplied from China. The physical properties of the base bitumen binder and nanoparticles are shown in (Table 1 & Figure 1)



**Fig 1:** Modifiers of asphalt binder (a) Al<sub>2</sub>O<sub>3</sub> nano particles (b) CaCO<sub>3</sub> nano particles.

**Table 1:** Physical properties of the base asphalt and nano particles.

Material	Properties	Test Method	Value
	Specific Gravity	ASTM D70	1.03
	Penetration @ 25 °C	ASTM D5	82
Bitumen	Softening point (°C)	ASTM D36	46
60/70	Viscosity @ 135 °C (Pa.s)	ASTM D4402	0.24
	Ductility (cm) @ 25 °C	ASTM D113	≥100
CaCO <sub>3</sub>	Size nm	-	40
	form		Powder
Al <sub>2</sub> O <sub>3</sub>	Size nm	-	13
	Form		Powder

**Preparation of Modified Asphalt Binders**

The base bitumen was heated to 150 °C and stirred for about 10 min, and the temperature was raised up to 170 °C. Three percentages of both modifiers (3, 5 and 7% by weight) were added gradually to the base asphalt binder with constant stirring at 170 °C under the high shear mixture speed of 5000rpm for 90min until it achieves a homogenous asphalt binder blend for each percentage respectively.

**Testing Procedures**

**Physical Properties**

The conventional physical tests, penetration test at 25 °C, Softening point (Ring and Ball) and ductility were conducted according to the American Society for Testing and Materials (ASTM); ASTM D5, ASTM D36, and ASTM D113 respectively.

**Storage Stability Test**

The adjusted black-top concrete stockpiling dependability was estimated as follows. The examples were filled an aluminum foil tube; the level of the cylinder is 16cm in with 3cm in measurement. The foil tubes were shut and put away upward at a temperature of 163±5 °C in a stove for 48 hours, accordingly cooled at room temperature and isolated evenly into three equivalent parts. The examples taken from the upper and lower segments were utilized to survey the capacity soundness of the ASA changed black-top concrete by deciding the areas relaxing focuses, assuming the contrast between the top and the base parts was under 2.5 °C, then the examples were considered to have fantastic high-temperature capacity security. Assuming the conditioning focuses varied by more than 2.5 °C, the ASA adjusted black-top fastener was viewed as unsound [12, 13].


**Dynamic Shear Rheometer (DSR)**

Dynamic Shear Rheometer (DSR) is utilized to decide the rheological properties of black-top folio, including complex shear modulus (G\*) and stage point (δ), at low, halfway and high temperatures. These boundaries can be utilized to portray both thick and flexible way of behaving of black-top. The upsides of G\* and for black-top folio are exceptionally reliant upon the test temperature and recurrence of stacking. G\* is a proportion of the complete opposition of a material to disfigurement when presented to a sinusoidal shear pressure load. G\* comprises of both versatile and gooey parts. The δ is a mark of the overall measures of gooey and flexible components. The DSR utilized researches the rheological properties of CaCO<sub>3</sub> and Al<sub>2</sub>O<sub>3</sub> nanoparticles changed black-top fasteners utilizing a recurrence clear test. The recurrence clear applied was 0.159 to 15 Hz, and the temperatures close enough 45+10 to 75 °C. One plate was utilized in the test, 25 mm width shaft with a hole of 1 mm.

**Results and Discussion**

**Physical Properties**


The penetration value was reduced for all modified binders at 25 °C compared with the base asphalt binder. The reduction in the penetration value for modified asphalt binders with CaCO<sub>3</sub> was 44.8mm to 3%, 35.4 mm for 5% and 42.4 for 7% respectively. Meanwhile, it was observed that the reduction in modified binders with Al<sub>2</sub>O<sub>3</sub> nanoparticles was. The maximum decrease in the penetration was noted with 5% for both modifiers compared with all asphalt binders. Furthermore, modified asphalt binders give a Higher softening temperature compared with base asphalt binder as shown in (Figure 2). Meanwhile, the base asphalt binder has the lowest softening point temperature. The decrease in penetration and an increase in the softening point of modified asphalt binders are a result of the stiffening effect of nanoparticles. In general, the addition of nanoparticles able to enhance the properties of base asphalt up to 5% of modifier, in the meantime concentration of 7% shows different behavior as the penetration increase and softening point decreased. It might be due to agglomeration of nanoparticles during the mixing process <sup>[14]</sup>.

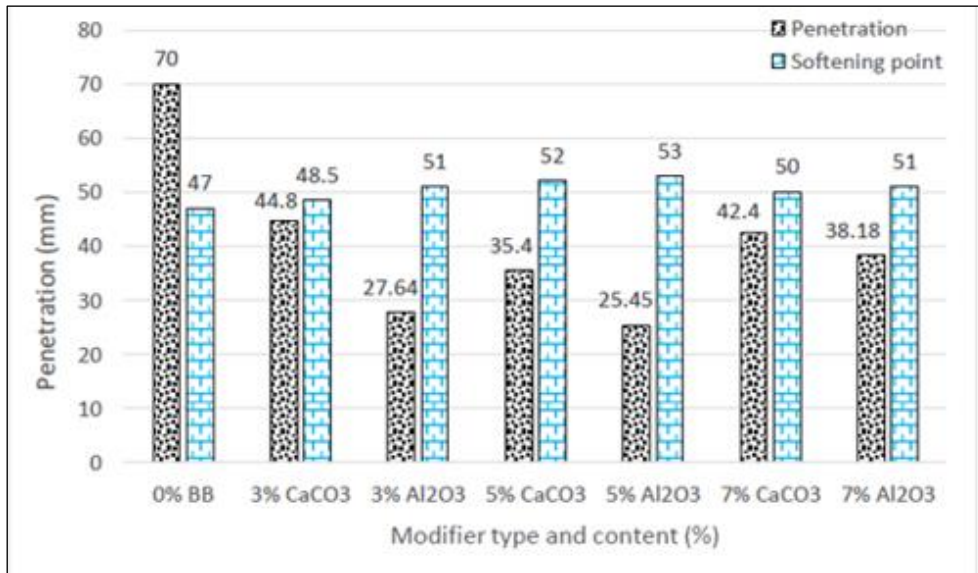

**Fig 2:** Penetration and softening point of modified asphalt binders.

**Storage Stability of Modified Asphalt Binders**

The difference in softening point values between the up and down sections of asphalt binders indicates its storage stability. The less value of the parts, the better storage stability for the modified asphalt binders <sup>[15]</sup>. (Figure 3) shows the storage stability of the base asphalt binder and modified asphalt binders. It was found that the differences in softening points in modified asphalt binders were 1 °C. Therefore, measuring the softening point of the up and bottom sections of each sample, show that the differences between the top and bottom pass the required value as it is less than 2.5 °C for all binders, this indicates that the nanoparticles modified asphalt binders were quite stable during stored at high temperatures.

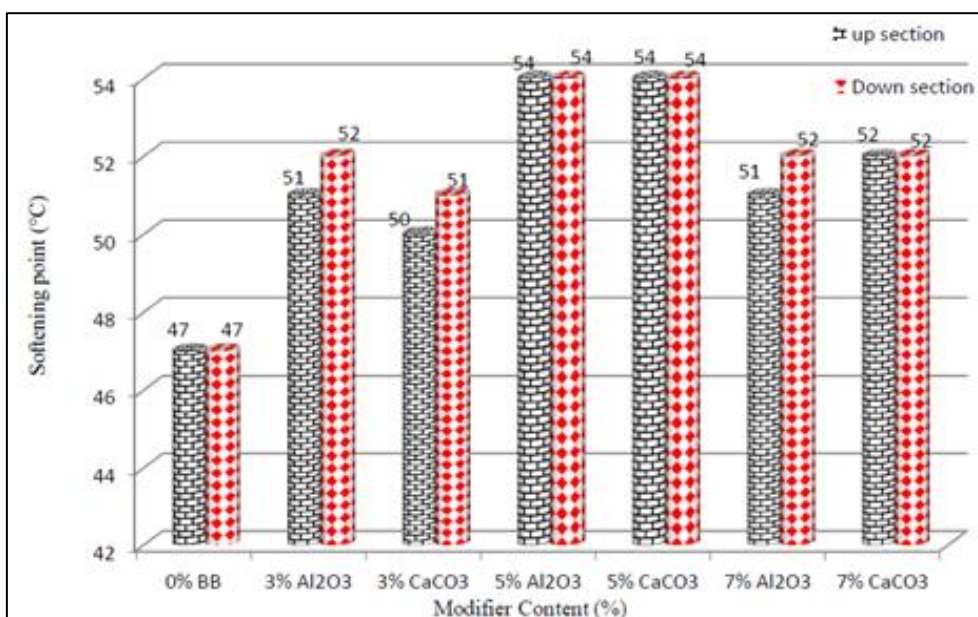

**Fig 3:** Storage stabilities of modified asphalt binders.

### The Dynamic Shear Rheometer (DSR)

Modify of asphalt binder usually perform in two types of the binders, regarding the compatibility between asphalt and the modifier; the first one, a heterogeneous blend, the asphalt binder, and modifier are incompatible, and they are separated into two phases. The second one is a homogeneous blend, asphalt binder, and the modifier are entirely compatible [16]. The evaluation of rheological properties of modified asphalt binder shows a significant improvement in the performance of asphalt binder. (Figure 4) shows that the addition of modifier increases the stiffness of modified asphalt binders. It was noted that the modified asphalt binders with  $Al_2O_3$  nano particles have the highest complex shear modulus among the binders, which mean the highest resistance to deformation at elevated temperatures. Wearase, the base asphalt binder has the lowest complex shear modulus.

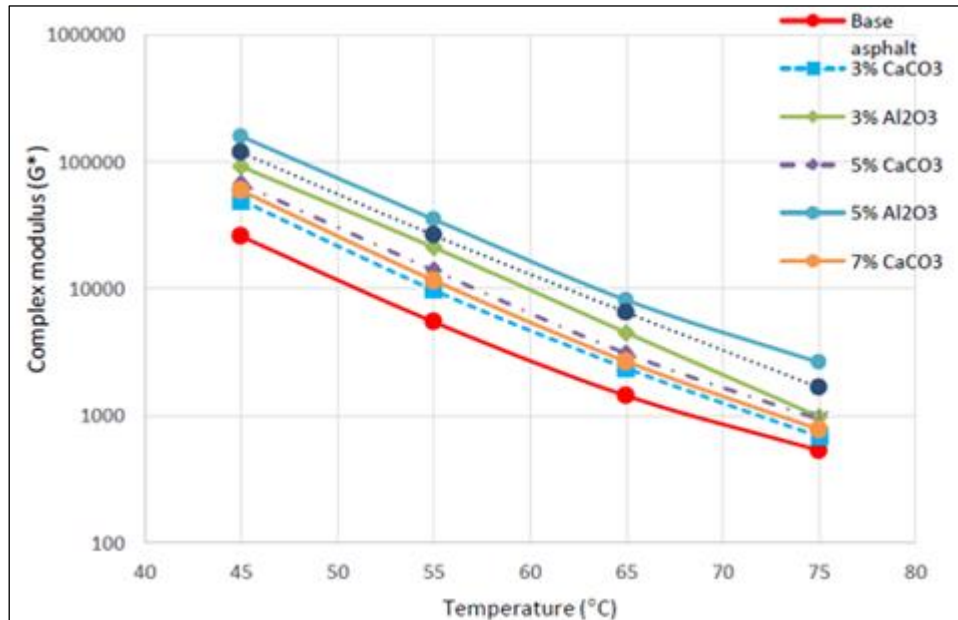


Fig 4: Isochronal plots of modified asphalt binders.

### Conclusion

The assessment of physical and rheological properties of black-top folio shows that the two modifiers have been effectively worked on the physical and rheological properties of adjusted black-top covers contrasted and base black-top. Central matters are recorded as:-

- The entrance diminished and relaxing point increment, and that implies the altered bitumen fasteners become more earnestly contrasted and base black-top, and the hardness of covers prompts lessen the temperature helplessness. Additionally, it was tracked down that the similarity among black-top and nanoparticles is huge, it could because of the uniform scattering of nanoparticles in the black-top mixes.
- The outcome shows that 5% of the two modifiers of black-top folio can be considered as the best execution of black-top fastener. From the blending and readiness of nano-and miniature altered black-top fasteners, it is derived that the nano-or miniature materials might have synthetic responses and actual scattering with the control black-top.
- From the DSR results, the expansion of NI.44P, MCF and NMN materials can build the complicated shear modulus of these altered black-top fasteners comparative with the control black-top folio, and work on the protection from rutting, in any case, the perplexing shear modulus of PMN changed black-top cover diminishes and the recuperation capacity of PMN adjusted black-top cover might be improved.
- FTIR spectroscopy shows the expansion of nano-or miniature materials in the black-top fastener, the oxidation response might be debilitated in the changed black-top cover when it is presented to daylight and intensity. In synopsis, the impact of adjusted black-top fastener on enemy of oxidation is improved when the chose nano-or miniature materials were included the control black-top.
- For future work, the black-top blend tests and model recreation are made arrangements for assessing the full scale properties of altered black-top combinations.

### References

1. Lesueur D. The colloidal construction of bitumen: Consequences on the rheology and on the instruments of bitumen change. *Propels in colloid and connection point science*,2003;145(1):42-82.
2. Read J, Whiteoak D. *The shell bitumen handbook*. Thomas Telford, UK, 2003.
3. Albrka S I, Amiruddin Ismail, Hussin AM Yahia, Mohd Azizul Ladin. Application of Transyt 7f on Signalized Road Junction Networks in Shah Alam and Petaling Jaya. *Jurnal Teknologi*,2013;69(2):59-64.
4. Fang C, Ruien Yu, Shaolong Liu, Yan Li. Nanomaterials applied in black-top alteration: A survey. *Diary of Materials Science and Technol-ogy*,2013;29(7):589-594.
5. Yildirim Y. Polymer changed black-top folios. *Development and Building Materials*,2013;21(1):66-72.
6. Peters SJ, Todd S Rushing, Eric N Landis, Toney K Cummins. Nanocellulose and microcellulose filaments for concrete.

- Transportation Research Record: Journal of the Transportation Research Board,2010:2142(1):25-28.
7. re Shahabadi A, Shokuhfar A, Ebrahimi Nejad S. Preparation and rheological portrayal of black-top folios built up with layered silicate nanoparticles. *Development and Building Materials*,2014:24(7):1239-1244.
  8. Yao H, Zhanping You, Liang Li, Shu Wei Goh, David Wingard *et al.* Performance of black-top folio mixed with non-changed and poly-mer-adjusted nanoclay. *Development and Building Materials*,2014:35:159-170.
  9. You Z, Julina Mills Beale, Justin M Foley, Samit Roy, Qingli Dai *et al.* Nanoclay changed black-top materials: Preparation and portrayal. *Development and Building Materials*,2014:25(2):1072-1078.
  10. Shiman L. Effects of nano composites on the high temperature rheological properties of a PG58 black-top folio in Proc GeoHunan, 2014.
  11. Yao H, Zhanping You, Liang Li, Chee Huei Lee, David Wingard *et al.* Rheological Properties and Chemical Bonding of Asphalt Mod-ified with Nanosilica. *Diary of Materials in Civil Engineering*,2015:25(11):1619-1630.
  12. Zhang F, J Yu, J Han. Effects of warm oxidative maturing on dy-namic thickness, TG/DTG, DTA and FTIR of SBS-and SBS/sulfur changed pavements. *Development and Building Materials*,2016:25(1):129-137.
  13. Al Mansob RA, Amiruddin Ismail, Che Husna Azhari, Mohamed Rehan karim, Aows N Alduri *et al.* Physical and rheological appropriate ties of epoxidized regular elastic adjusted bitumens. *Development and Building Materials*,2015:63:242-248.
  14. Ali Shaban Ismael Albrka, Ismail, Amiruddin, Karim, Mohamed Rehan *et al.* Performance assessment of Al<sub>2</sub>O<sub>3</sub> nanoparticle-changed as-phalt folio. *Street Materials and Pavement Design*,2017:18(6):1251-1268.
  15. Yu Ruien, Changqing Fang, Pei Liu, Yan Li, Xiaolong Liu. Storage soundness and rheological properties of black-top altered with squander pack-maturing polyethylene and natural montmorillonite. *Applied Clay Science*,2017:104:1-7.
  16. Leticia Socal da Silva, Maria Madalena de Camargo Forte, Leonardo de Alencastro Vignol, Nilo Sérgio Medeiros Cardozo. Study of rheo-intelligent properties of unadulterated and polymer altered Brazilian black-top tie ers. *Diary of Materials Science*,2017:39(2):539-546.